High Pace

http://www.high-pace.com Email: info@high-pace.com

HF-2510

25 x 25 x 10.5 MM

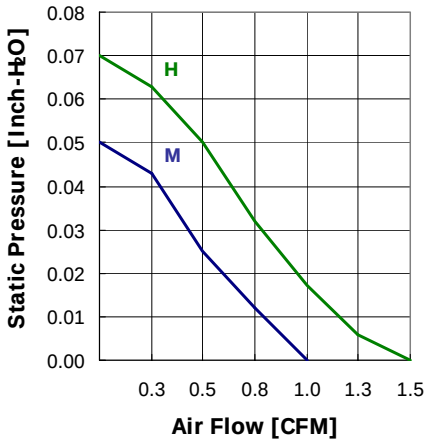

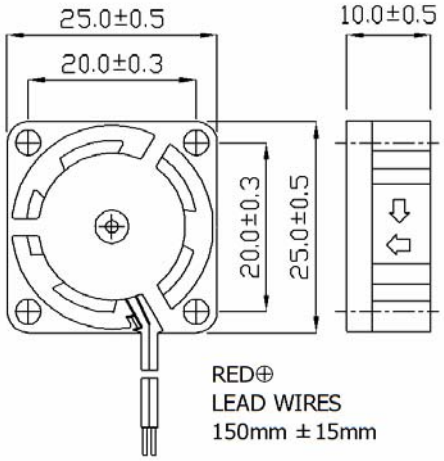

SPECIFICATION

Net Weight: 6g ± 2g

Part No.	Rated Voltage (V)	Speed (RPM)	Current (Amp)	Voltage Range (V)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dBA)	Bearing	Life Expectancy (@25℃ / Hour)
HF-2510-S05L	05	7000	0.09	04~07	0.8	0.03	22	Sleeve	19,000
HF-2510-B05L								One Ball & One Sleeve	70,000
HF-2510-D05L								Dual Balls	75,000
HF-2510-S05M	05	9000	0.12	04~07	1.0	0.05	24	Sleeve	17,000
HF-2510-B05M								One Ball & One Sleeve	60,000
HF-2510-D05M								Dual Balls	65,000
HF-2510-S05H	05	12000	0.18	04~07	1.4	0.07	29	Sleeve	13,000
HF-2510-B05H								One Ball & One Sleeve	40,000
HF-2510-D05H								Dual Balls	45,000
HF-2510-S12L	12	7000	0.08	07~15	0.8	0.03	22	Sleeve	19,000
HF-2510-B12L								One Ball & One Sleeve	70,000
HF-2510-D12L								Dual Balls	75,000
HF-2510-S12M	12	9000	0.10	07~15	1.0	0.05	24	Sleeve	17,000
HF-2510-B12M								One Ball & One Sleeve	60,000
HF-2510-D12M								Dual Balls	65,000
HF-2510-S12H	12	12000	0.16	07~15	1.4	0.07	29	Sleeve	13,000
HF-2510-B12H								One Ball & One Sleeve	40,000
HF-2510-D12H								Dual Balls	45,000

★ High Pace reserve the rights to change data without notice.

★ Custom specifications are available on request.

October 2004